

Versatile Multi-range Checkweigher

DACS-G-S060

- Superior weight inspection
- Up to 6,000g weighing capacity
- Comprehensive data reporting
- Durable, sanitary design
- User-friendly operation



Specification

Model	DACS-G-S060-SS/CR	
Weighing capacity	6,000g (3000g 6000g multi-range)	
Weighing range	30~3,000g	60~6,000g
Minimum graduation	0.2g	0.5g
Weighing speed*1	MAX 440 items/min	MAX 240 items/min
Weighing accuracy (3)*1	±0.4g~	±1g~
Weigh sensor	Double-beam load cell (high output)	
Product dimensions	Length	58~590mm
	Width	20~400mm
	Height	10~180mm (With windshield cover : ~130mm)*2
Belt speed	MAX. 120m/min : 1m/min interval (CR : 95m/min)	
Construction	Standard : IP30 (International standard) Waterproof : IP69K (International standard)	
Power supply	Single phase AC100~120V, Single phase AC200~240V	
Temperature	0°C~40°C (Humidity 30~85%, no condensation)	
Main body weight	Approx. 90kg (without metal detector)	
Standard devices	USB slot for data collection*3	
Options	Various options, including integrated metal detector, are available. Please contact Heat and Control.	


*1 Weighing accuracy and speed depend on product shape and other conditions.

*2 Windshield cover is an option.

*3 Use the USB devices which Ishida specifies.


Dimension

(Unit:mm)

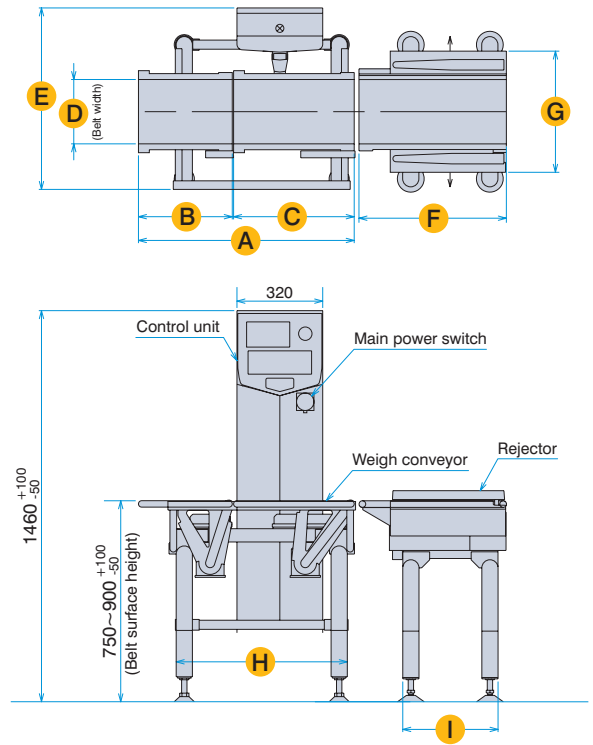

Model	A	B	C	D	E	F	G	H	I
DACS-G-S060-22/SS(CR)	605(600)	350(345)	250(245)	240	670	550(545)	455	540	355(475)
DACS-G-S060-23/SS(CR)	705(700)	350(345)	350(345)	240	670	550(545)	455	640	355(475)
DACS-G-S060-24/SS(CR)	805(800)	350(345)	450(445)	240	670	550(545)	455	640	355(475)
DACS-G-S060-33/SS(CR)	705(700)	350(345)	350(345)	320	800	750(745)	535	640	525(675)
DACS-G-S060-34/SS(CR)	905(900)	450(445)	450(445)	320	800	750(745)	535	840	525(675)
DACS-G-S060-35/SS(CR)	1005(1000)	450(445)	550(545)	320	800	750(745)	535	840	525(675)
DACS-G-S060-36/SS(CR)	1205(1200)	550(545)	650(645)	320	800	750(745)	535	1040	525(675)
DACS-G-S060-44/SS(CR)	900(900)	445(445)	445(445)	400	800	845(845)	615	840	620(775)
DACS-G-S060-45/SS(CR)	1000(1000)	445(445)	545(545)	400	800	845(845)	615	840	620(775)
DACS-G-S060-46/SS(CR)	1200(1200)	545(545)	645(645)	400	800	845(845)	615	1040	620(775)

*() are sizes of the CR waterproof model

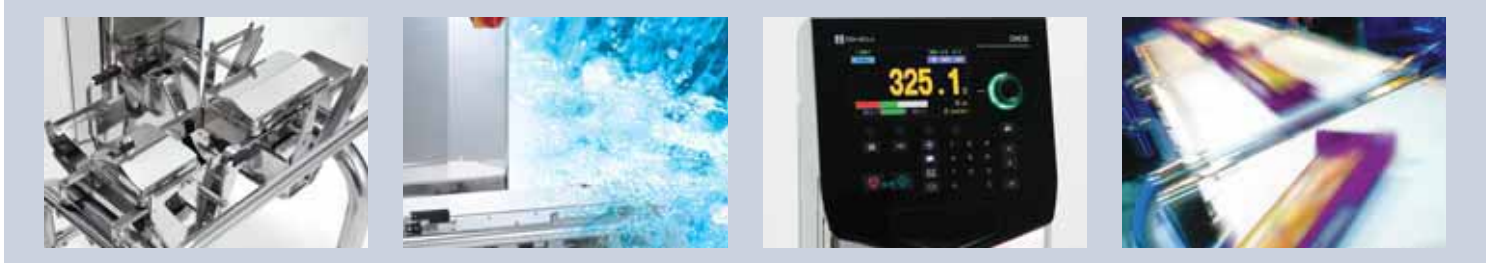

"Ishida, the world leader in weighing technology, also manufactures a full line of multihead weighers, X-ray inspection systems, and packaging machines."



ISHIDA

ISHIDA CO., LTD.

44 SANNO-CHO, SHOGOIN, SAKYO-KU
KYOTO, 606-8392 JAPAN
PHONE: 81-75-771-4141
FACSIMILE: 81-75-751-1634
URL: <http://www.ishida.com>

Specifications and design are subject to change without notice.

HEAT AND CONTROL

HEAT AND CONTROL, INC.

21121 CABOT BLVD.
HAYWARD, CA 94545-1132 USA
PHONE: 1(800)227-5980
1(510)259-0500
FACSIMILE: 1(510)259-0600
www.heatandcontrol.com
info@heatandcontrol.com