

HEAT AND CONTROL[®]

MPO Cooking System[®] convection oven



**Versatile, high yield
cooking process!**

HEAT AND CONTROL

MPO Cooking System® convection oven

Proven high-yield cooking process delivers unmatched product quality and versatility.

Higher yield

The MPO's unique cooking process preserves more of the original moisture content and flavor of foods. Precisely control the interaction between cooking temperature and moisture to achieve rapid heat transfer without dehydration. And you can develop the ideal surface texture while maintaining valuable yield.

Multi-product flexibility

Use one oven to cook poultry, beef, pork, seafood, vegetable and filled products. Cooking parameters for a variety of products can be quickly recalled with an optional menu-driven PLC control system.

Repeatable quality

Establish settings for temperature, moisture, and cooking time and the MPO will repeat the same finished product qualities every time.


Process versatility

Use the MPO with our coating applicators, fryers, Rotary Brander, Direct Flame Searer and AirForce® impingement oven for custom-finished products.


Less cleaning downtime

Without sticking or burning, product renderings simply drain off the MPO's water-cooled pan. The conveyor belt is continuously cleaned during operation. After cooking, clean-in-place sprays thoroughly sanitize all product contact areas, with no disassembly required.

Built to USDA standards



Rotary brushes and a hot water rinse continuously clean the conveyor belt.





Product particles are rinsed from the belt as it leaves the oven. Automatic tensioner prolongs belt life.



Clean-in-place sprays sanitize the pan, hood and air circulation fan.



Choose from fuel-fired direct or indirect heating. Electric and thermal fluid heating systems are also available.

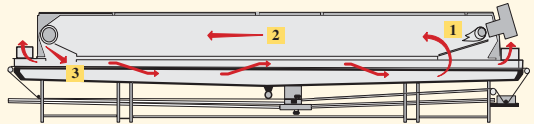


The MPO Cooking Process

Superheated steam condenses around foods, quickly transferring heat and sealing in natural moisture and flavor without oxidation or dehydration.

- 1 Circulating air is heated.
- 2 Air moisture content is precisely controlled.
- 3 Cooking atmosphere is evenly circulated above and below the product conveyor to all product surfaces for uniform, high yield cooking. Multi-zone ovens feature counterflow air circulation.

Cooking atmosphere completely envelops the product for rapid heat transfer. Drippings drain from the oven's water-cooled pan without burning or sticking.

Heat and Control supplies the complete system, plus worldwide parts and technical support.



Coat

Convey

Fry

Bake/Roast

Brand

Freeze

Package

MPO Cooking System® convection oven | *Model MPO-D*

For high-capacity production or product development, there's an MPO Cooking System® designed for your needs.



Dual lane MPO cooking system.



MPO Configuration Choices

Cook Length	Available in 2' (6m) increments from 8' (2.4m) to 60' (18.3m) long.
Product Conveyor	Standard belt widths available from 28" (71 cm) to 80" (203cm). Choose single or dual lane conveyors using a variety of belt styles.
Heating System	Fuel fired direct or indirect heating, electric or thermal fluid heating in single or multiple zones.

Constant improvement and engineering innovations mean these specifications may change without notice.

MPO Cooking System® convection oven is a registered trademark of Heat and Control Inc.

HEAT AND CONTROL



Headquarters
21121 Cabot Blvd., Hayward, CA 94545 USA
Tel 1 800 227 5980 / 1 510 259 0500 Fax 1 510 259 0600
Campbellville, Canada
Tel 905 854 5650 Fax 905 854 5653
Guadalajara, Mexico
Tel +52 (33) 3689 1146 Fax +52 (33) 3689 2240
Livingston, Scotland
Tel +44 (0)1506 420420 Fax +44 (0)1506 403919
Brisbane, Australia
Tel +61 (0)7 3877 6333 Fax +61 (0)7 3343 8371
Nanjing, People's Republic of China
Tel +86 257 8403 5000 Fax +86 257 8580 5033
Singapore
Tel +65 6273 6362 Fax +65 6273 8161



Over 30 Offices Worldwide

www.heatandcontrol.com • info@heatandcontrol.com • ©2007 Heat and Control, Inc.