


## Micro Breader™ Breading Applicator

Model MBD


Two feet shorter than our full-size models, this reduced-length breading applicator delivers the same performance, reliability, and uniformly applies all styles of breadings.

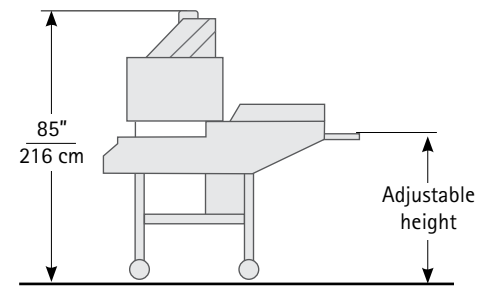

► Only 90" Long ◀

Model	Belt Width	Overall Width	Overall Length
BD-24	24"/ 61 cm	55"/ 91 cm	90"/229 cm
BD-36	36"/ 91 cm	67"/170 cm	90"/229 cm
BD-42	42"/107 cm	73"/185 cm	90"/229 cm

*Dimensions are rounded to the nearest inch/centimeter.*  
Constant improvement and engineering innovations mean these specifications may change without notice.

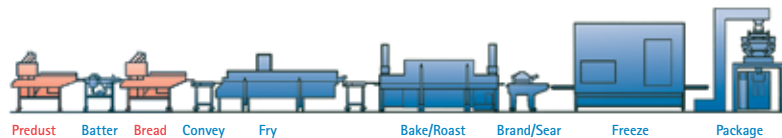

Visit our Demonstration Centers to test our complete line of coating, cooking, conveying, inspection, weighing and packaging equipment!



### Fast Service Worldwide

For the best selection of processing, conveying, packaging, and inspection equipment with rapid-response service, parts, and training from one source, contact us today.



HEAT AND CONTROL®

Learn more about our complete line of coating applicators  
[www.heatandcontrol.com](http://www.heatandcontrol.com)  
[info@heatandcontrol.com](mailto:info@heatandcontrol.com)  
© 2014 Heat and Control

# Apply all styles of breadings in less space!

## MICRO BREADER™ Breading Applicator

More Versatility • Less Floor Space



HEAT AND CONTROL®





# Micro Breader™ Breeding Applicator

Apply all styles of breadings in less floor space.

Get all the versatility and durability of our full-size Breeding Applicator in a shorter model that uniformly applies flour, crumb, and delicate Japanese-style flake coatings.

Like all SureCoat applicators, this reduced-length model delivers fast changeovers, simple sanitation, and years of reliable coating for poultry, seafood, meat, and vegetables.

### Uniform coverage

Independently adjust breeding bed density and the rate of top coverage for thorough coating of all product surfaces using almost any style of breeding.

### Adjustable bed density

Control how deeply products sink into the breeding bed. Simply adjust the speed of our breeding lifter conveyor to change bed density from firm to fluffy.

### Quick changeovers

It takes only minutes to switch from free-flowing to non free-flowing coatings using our interchangeable hoppers and large clean-outs.

### Long belt life

Continuous automatic belt tension adjustment compensates for conveyor belt wear and load changes to reduce belt breakage and unplanned line shutdowns.

### Simple sanitation

All parts remain on the applicator during cleaning to prevent loss or damage. Large cleanouts speed removal of breeding and permit complete internal access for thorough sanitation.

### Rugged construction

Heavy-gauge stainless steel construction with smooth-welded joints, plated drives, and roller bearings improve durability and exceed USDA sanitation guidelines.



Uniformly apply flake, flour, and crumb coatings in less space.




Low level easy-fill

Large clean-out doors speed changeovers

Central drive control and single point hydraulic connection



Sifter conveyor removes lumps from non free-flowing breeding hopper.

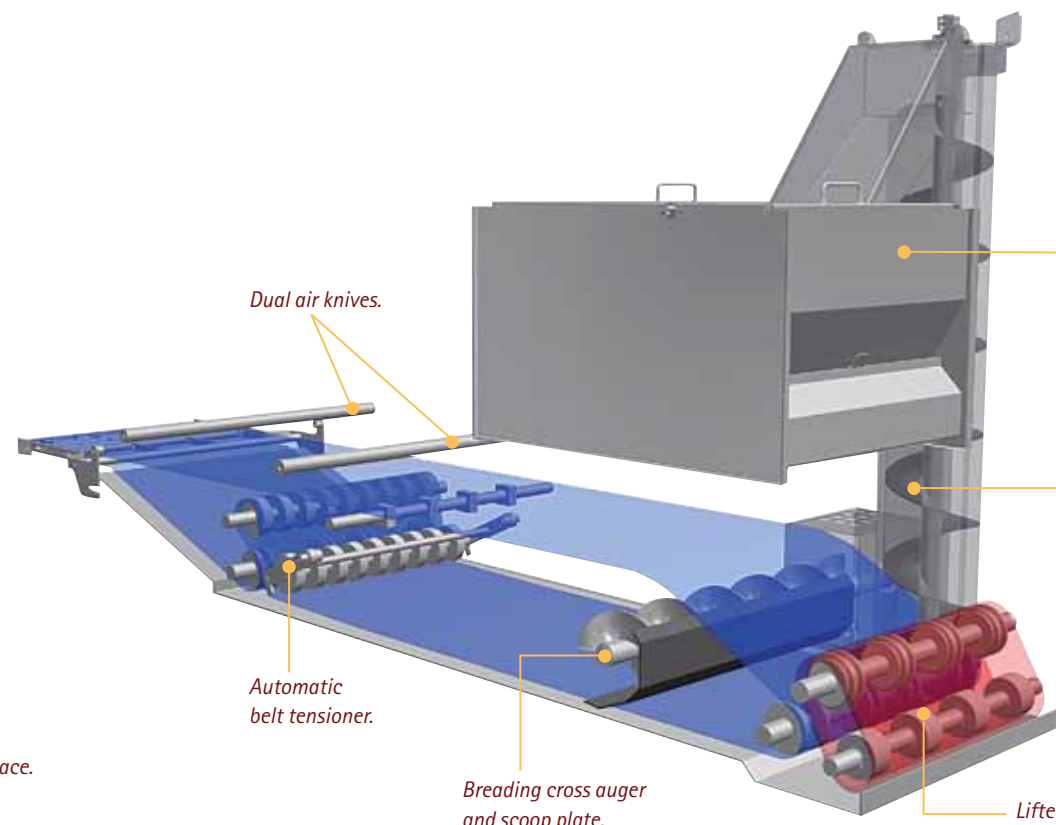

Dual air knives.

Automatic belt tensioner.

Breeding cross auger and scoop plate.

Interchangeable hoppers for free-flowing and non free-flowing breadings.

Large diameter variable speed augers transfer breeding quickly and reduce crumb breakdown.

Lifter conveyor.



Choose from a variety of rollers to gently press breeding onto products.