

KleenHeat® Pollution Control Heat Exchanger

KleenHeat makes the difference in snack, french fry, and prepared foods frying operations.


Available in a variety of sizes, standard KleenHeats are provided as ready-to-run, pre-piped and wired units and are fully compliant with US, EC, and Australian regulations.

KleenHeat can also be used as a thermal fluid heating system with the added advantage of controlling fryer pollution at the same time.

KleenHeat options include:

- Automation interface.
- Add-on hot water condenser for enhanced plant efficiency.
- Combustion air preheater to further maximize combustion efficiency.
- Oil Mist Eliminator for existing fryers.
- Burner systems designed for your fuel, insurance, and safety requirements.
- Stainless or painted steel casing.
- Custom sizing and configurations.

Burner packages may vary depending on application, fuel and installation location.

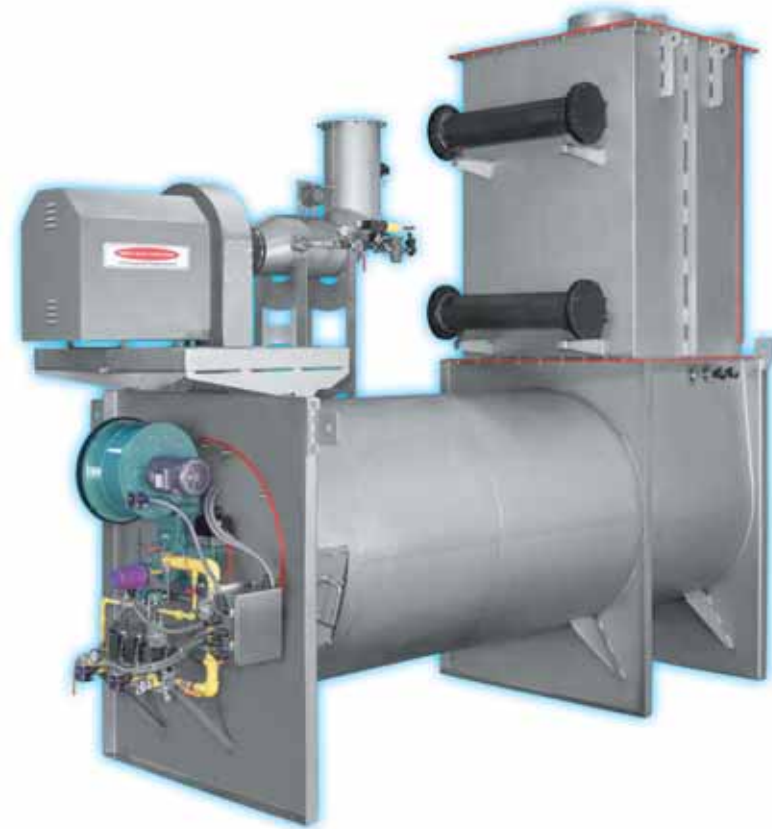

Heat and Control builds a variety of cooking oil heat exchangers, filters, heat recovery systems and fryer stack Oil Mist Eliminators. Contact us to design the best system for your application.

Constant improvement and engineering innovations mean these specifications may change without notice.

HEAT AND CONTROL



Headquarters
21121 Cabot Blvd., Hayward, CA 94545 USA
Tel 1 800 227 5980 / 1 510 259 0500 Fax 1 510 259 0600
Guadalajara, Mexico
Tel 52 33 3689 1146 Fax 52 33 3689 2240
Livingston, Scotland
Tel +44 (0)1506 420420 Fax +44 (0)1506 403919
Jenbach, Austria
Tel +43 5244 64355 Fax +43 5244 64366
Brisbane, Australia
Tel +61 (0)7 3877 6333 Fax +61 (0)7 3343 8371
Singapore
Tel +65 6273 6362 Fax +65 6273 8161

Over 30 Offices Worldwide www.heatandcontrol.com • info@heatandcontrol.com • ©2003 Heat and Control, Inc.

HEAT AND CONTROL

KleenHeat® Pollution Control Heat Exchanger



Without KleenHeat

With KleenHeat

The KleenHeat Difference!

*Efficient heating
of cooking oil with
superior pollution control*



KleenHeat® Pollution Control Heat Exchanger


Remove oil, odors and particulates from fryer exhaust with this high-efficiency heat exchanger.

KleenHeat® combines efficient external heating of cooking oil with superior pollution control. Surpassing simple afterburner technology, KleenHeat connects to your fryer exhaust stack and incinerates virtually all odors, oil and other particulates that would normally pollute the air and area around your plant.

Regulatory agencies worldwide recognize KleenHeat's pollution control method as the "Best Available Control Technology" (BACT) and increasingly require this equipment for new and upgraded fryer lines.

KleenHeat exceeds the thermal efficiency of ordinary heat exchangers that don't offer pollution control! Low oil volume promotes fast oil turnover and inhibits formation of free fatty acids. Rapid, uniform heat transfer allows your fryer to respond quicker to changes in product load, and protects oil quality by maintaining a low oil film temperature.

Fines never accumulate inside KleenHeat's unique self-cleaning cooking oil circulation tube bundles. Tubes last longer and cleaning is accomplished during routine fryer system boil-out.

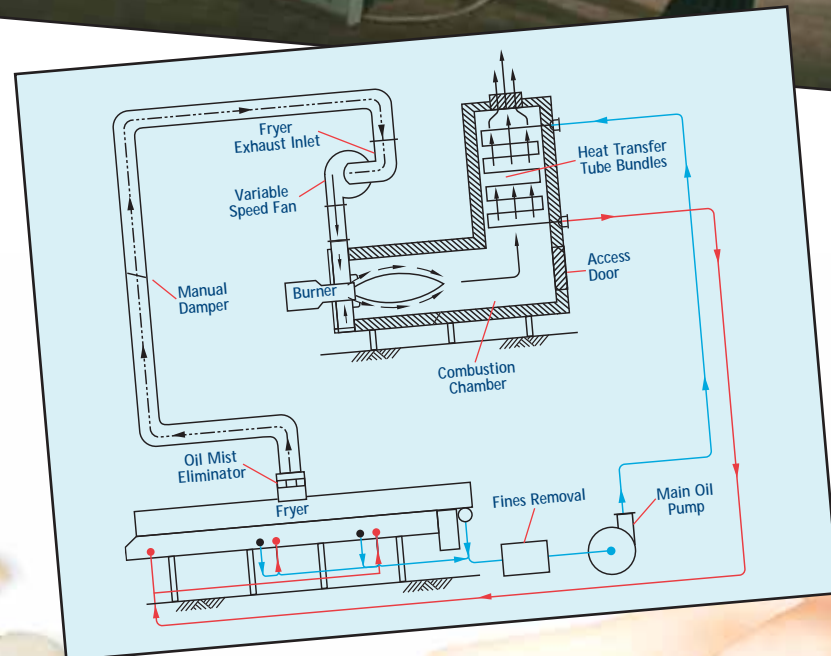

Typical KleenHeat installation.
All components supplied by Heat and Control.

The KleenHeat Difference

- A** Fryer exhaust containing water vapor, cooking oil, odors and particulates passes through an Oil Mist Eliminator in the fryer stack and enters KleenHeat.
- B** A single heavy duty gas-tight fan delivers exhaust pollution into the combustion chamber. The variable speed fan automatically modulates the flow to maintain optimum pollution control performance.
- C** Every KleenHeat includes a pre-piped, pre-wired package burner that includes automatic flame modulation, a diagnostic flame protection system, a high turndown ratio, and temperature readouts for system monitoring.
- D** Pollutants and odors are thoroughly eliminated as the burner fires to heat the cooking oil.
- E** Lightweight ceramic fiber insulation keeps casing temperatures low and does not deteriorate from age or thermal stress. Low residual heat capacity enhances the temperature control characteristics and eliminates overheating of oil during unscheduled shutdowns.
- F** All welded stainless steel serpentine tube bundles are maintenance-free. Completely self-draining, the tubes are self-cleaning and never need to be "rodded". Inlet and outlet headers are easily inspectable, requiring no hoists or platforms. Normal thermal expansion produces no stressing or buckling of the tubes, assuring years of reliable, trouble-free operation.
- G** KleenHeat is the only pollution control system designed to compensate for the radical change in heat transfer dynamics from the bottom to the top of the heat exchanger. Our innovative "graduated density" tube bundles allows heat to transfer evenly without hot spots – providing low oil film temperatures throughout!

