



# Spiral Oven | Model SC


Since 1978, Heat and Control has built spiral ovens for custom applications. Contact us to configure an oven for your special requirements.

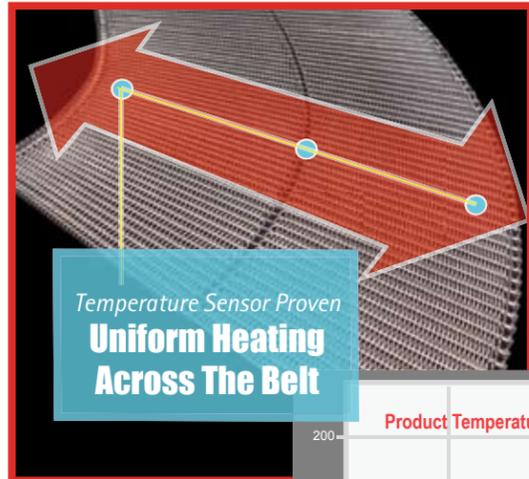

Temperature sensor tests prove heating is consistent across all conveyor tiers for fast cooking, high yields and greater production output.

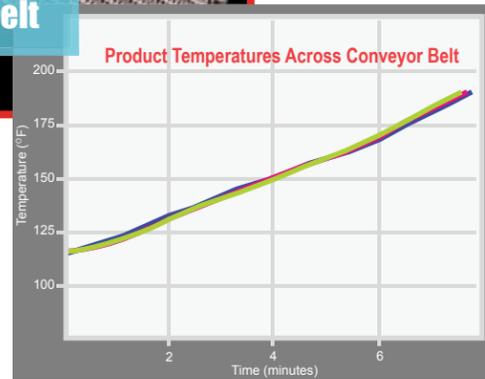

Temperature is virtually identical across the width of the product conveyor belt.

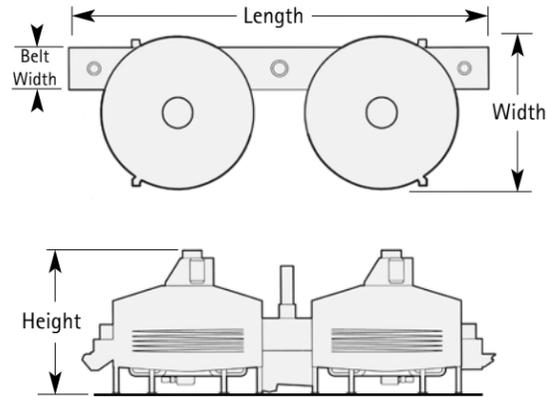

Contact us for a single or twin-drum Spiral Oven custom-designed for your plant.

Constant improvement and engineering innovations mean these specifications may change without notice.

**HEAT AND CONTROL**




Headquarters  
21121 Cabot Blvd., Hayward, CA 94545 USA  
Tel 1 800 227 5980 / 1 510 259 0500 Fax 1 510 259 0600  
Campbellville, Canada  
Tel 905 854 5650 Fax 905 854 5653  
Guadalajara, Mexico  
Tel +52 (33) 3689 1146 Fax +52 (33) 3689 2240  
Livingston, Scotland  
Tel +44 (0)1506 420420 Fax +44 (0)1506 403919  
Brisbane, Australia  
Tel +61 (0)7 3877 6333 Fax +61 (0)7 3343 8371  
Singapore  
Tel +65 6273 6362 Fax +65 6273 8161

Over 30 Offices Worldwide [www.heatandcontrol.com](http://www.heatandcontrol.com) • [info@heatandcontrol.com](mailto:info@heatandcontrol.com) • ©2006 Heat and Control, Inc.

**HEAT AND CONTROL**

## Spiral Oven

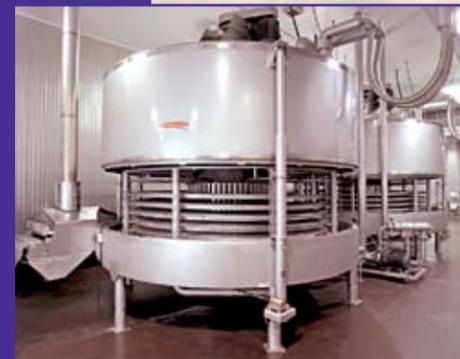

**Uniform cooking  
for higher yields  
& greater capacity!**

**HEAT AND CONTROL**

## Spiral Oven

Uniform heating and precise control of cooking conditions deliver performance unmatched by any other spiral oven – *single or two-zone!*

### 360° uniform air flow

Our cylindrical design circulates air in an even 360° pattern. Air flows uniformly around all sides of the conveyor, instead of from one side as on competitive ovens. Temperatures are consistent across the full width of each conveyor tier, and from top to bottom of the drum.

### Faster cooking

Enhanced airflow produces uniform temperature across the belt and reduces product time in the oven.

### Greater production

Shorter cook times allow more product throughput.

### Higher yields


Uniform heating eliminates the need to overcook to assure all product reaches a safe core temperature.

### Smart sanitation

A fully-automated clean-in-place system reduces cleaning time and costs, while cylindrical enclosures eliminate hard-to-clean corners.

### Simple maintenance

Mechanically simpler than other ovens, all components are easily accessible and built for long term reliability.

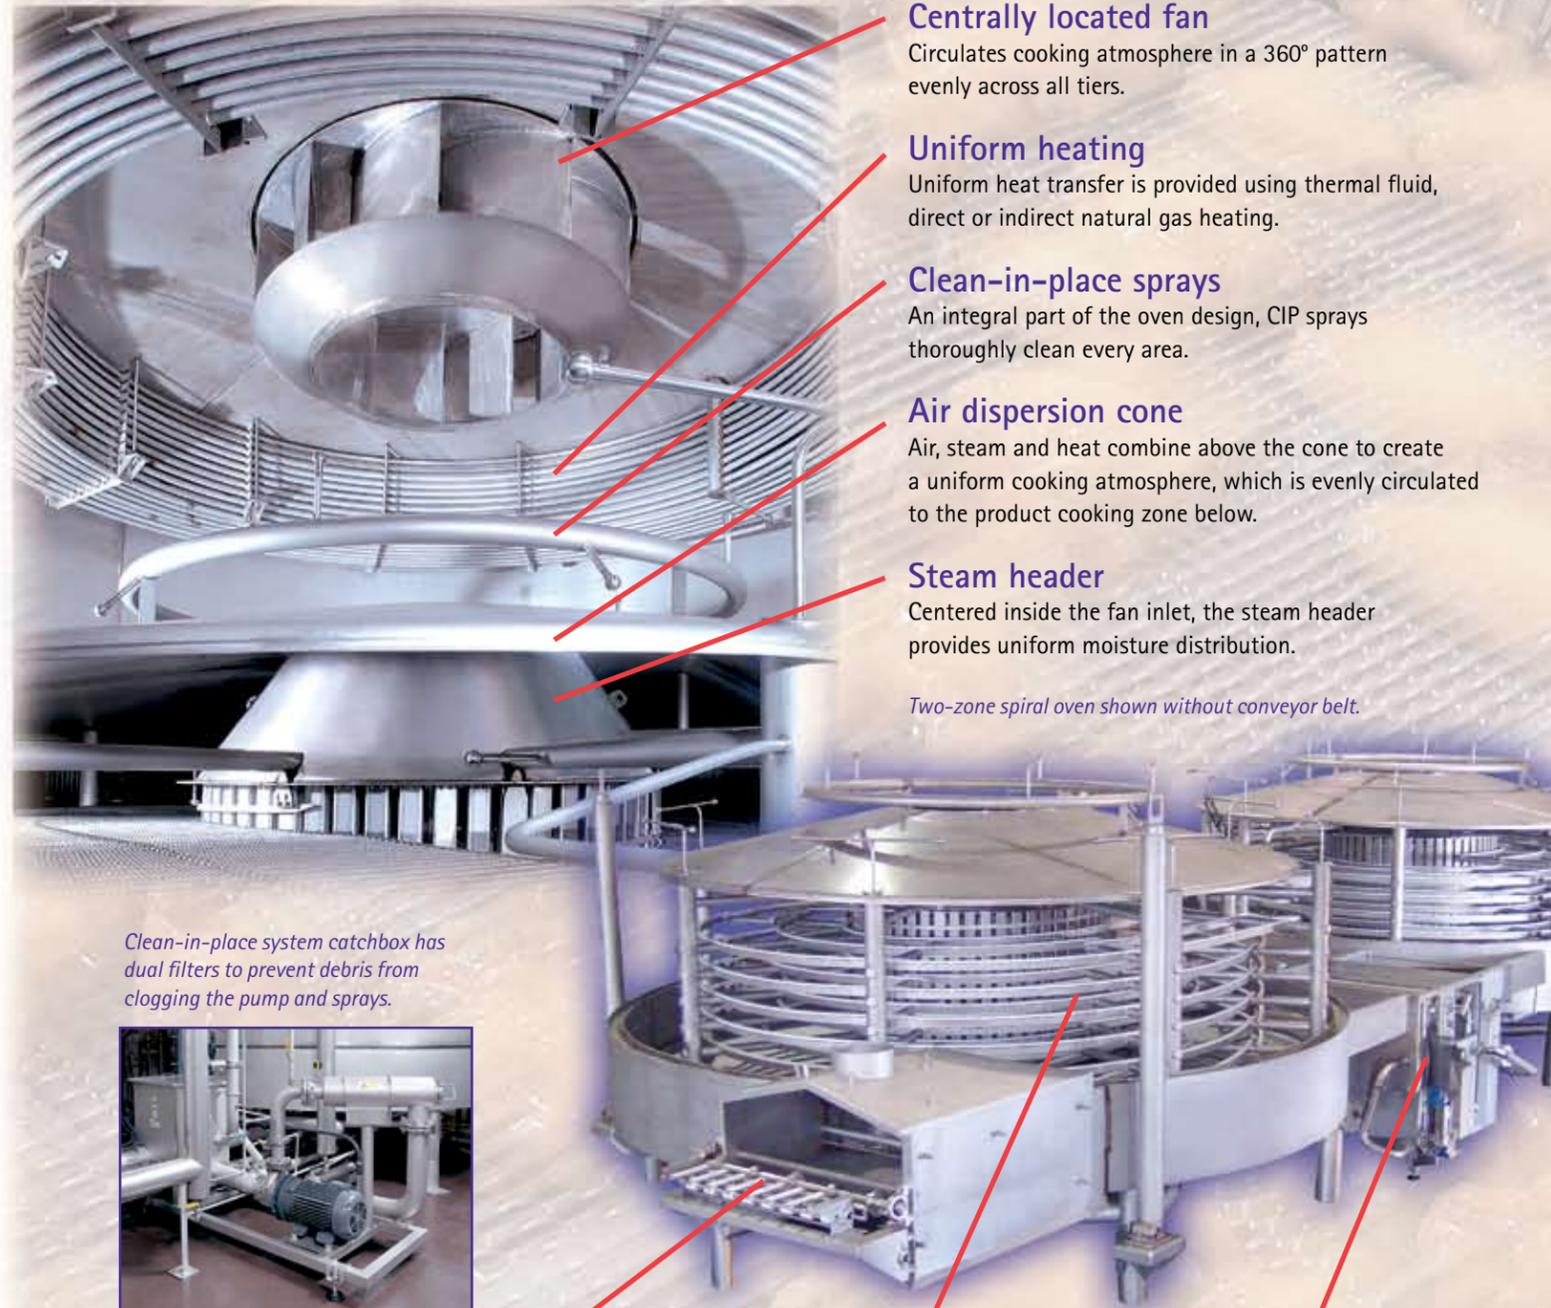

### Centrally located fan

Circulates cooking atmosphere in a 360° pattern evenly across all tiers.

### Uniform heating

Uniform heat transfer is provided using thermal fluid, direct or indirect natural gas heating.

### Clean-in-place sprays

An integral part of the oven design, CIP sprays thoroughly clean every area.

### Air dispersion cone


Air, steam and heat combine above the cone to create a uniform cooking atmosphere, which is evenly circulated to the product cooking zone below.

### Steam header

Centered inside the fan inlet, the steam header provides uniform moisture distribution.

*Two-zone spiral oven shown without conveyor belt.*

*Clean-in-place system catchbox has dual filters to prevent debris from clogging the pump and sprays.*

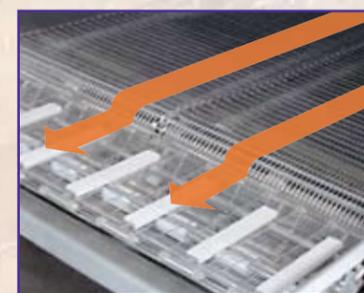

*Discharge/infeed transfer conveyors prevent product damage during transfer. Lecithin applicator is available on infeed belt to reduce product sticking.*




*Clean-in-place sprays are built into the conveyor support framework to thoroughly clean both sides of the belt.*



*Rotary brushes, water sprays, and air blowoffs continually clean and dry the conveyor belt.*

## Faster, More Uniform Cooking By Design!

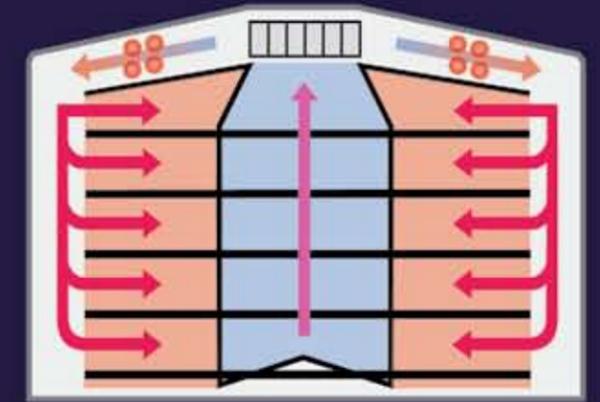

*Centered inside the top of the cylindrical enclosure, one fan circulates the cooking atmosphere in a 360° pattern evenly across all conveyor tiers.*

- Uniform temperature across the belt
- Fast cook times
- High product yields
- Increased production output

## True Two-Zone Cooking Control



*On two-zone models, venting exhaust through a central stack prevents the cooking atmosphere from migrating between zones. Steam only, dry heat, or any combination can be controlled independently in each zone without affecting the other zone.*