

Micro-Meter II[™] Airless Belt-Top Liquid Applicator



Accurately meter and spray oils, antioxidants, vitamins, flavors, tack and release agents, and other liquid coatings.

The Micro-Meter II is designed for accurate and reliable over-the-belt or top-and-bottom delivery of liquid coatings on oven bands, dehydrator belts, and in pan and cavity applications. It is a complete gravity fed, pulse operating spray system.

Our 40-Series piston-driven positive displacement pump creates a steady, controlled, atomized spray without the need to mix coatings with your plant's compressed air supply. This airless pump reduces overspray and waste. Patented self-adjusting positive shut-off poppet nozzles evenly apply a variety of liquid coatings.

Standard Features


- Adjust liquid application rates up to 250 strokes/minute
- 40-Series positive displacement pump with adjustable micrometer settings
- Internally plumbed remote nozzle spray arm with self-adjusting poppet nozzles
- 20 quart (18.9 liters) stainless steel stock pot with sight gauge to easily monitor liquid level
- NEMA 4 stainless steel control console with PLC
- 304 stainless steel construction
- Externally mounted air filter, regulator, lubricator, and solenoid
- Mounting hardware package

Options

- 40 quart (37.8 liters) stainless steel stock pot with sight gauge or level sensors
- Heated manifold, spray arm, and supply tank
- 316 stainless steel nozzles in various sizes and spray widths
- Water-flush pumps
- Pneumatic and fluid isolation valves
- Delta Liquid[™] gravimetric system
- Specialty alloy construction



Micro-Meter II™ Airless Belt-Top Liquid Applicator

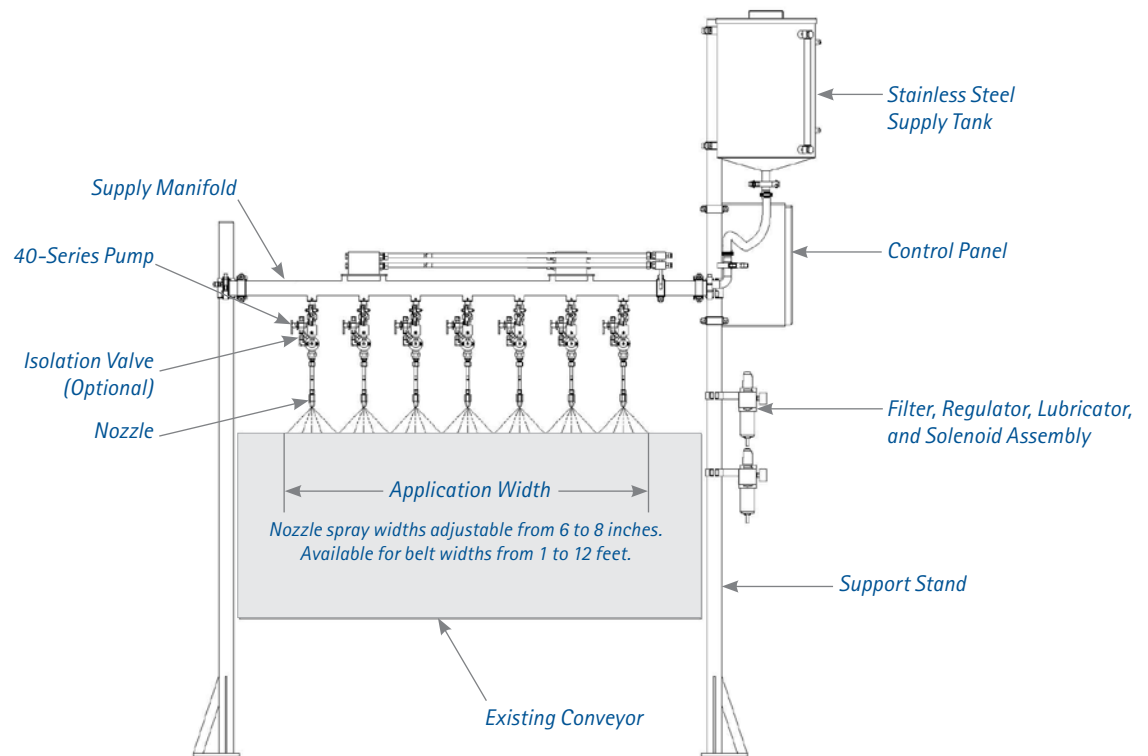

Utilities

- 115/220V, 1ph, 60Hz
- Compressed air - up to 3.2 scfm per nozzle at 80 psi

Constant improvement and engineering innovations mean these specifications may change without notice.



Reliable and efficient, our 40-Series positive displacement airless pump reduces overspray and waste.

