

High-Performance Checkweigher

DACS-G-F006/030

- Superior inspection accuracy
- High speeds, up to 600 wpm
- Comprehensive data reporting
- Durable, sanitary design
- User-friendly operation



Specification

Model	DACS-G-F006-SS/CR	DACS-G-F030-SS/CR
Weighing capacity	600g	3,000g
Weighing range	1.5~600g	7.5~3,000g
Minimum graduation	0.01g	0.05g
Weighing speed *1	MAX 600 items/min	MAX 440 items/min
Weighing accuracy (3) *1	±0.02g~	±0.1g~
Weigh sensor	Electromagnetic balance type	
Product dimensions	Length	46~300mm
	Width	20~160mm
	Height	10~180mm (With windshield cover : ~130mm) *2
Belt speed	MAX. 120m/min : 1m/min interval (CR : 95m/min)	
Construction	Standard : IP30 (International standard) Waterproof : IP69K (International standard)	
Power supply	Single phase AC100~120V, Single phase AC200~240V	
Temperature	0°C~40°C (Humidity 30~85%, no condensation)	
Main body weight	Approx. 80kg (without metal detector)	Approx. 90kg (without metal detector)
Standard devices	USB slot for data collection*3	
Options	Various options are available. Please contact Heat and Control.	


*1 Weighing accuracy and speed depend on product shape and other conditions.

*2 Windshield cover is an option on DACS-G-F030.

*3 Use the USB devices which Ishida specifies.


Dimension

(Unit:mm)

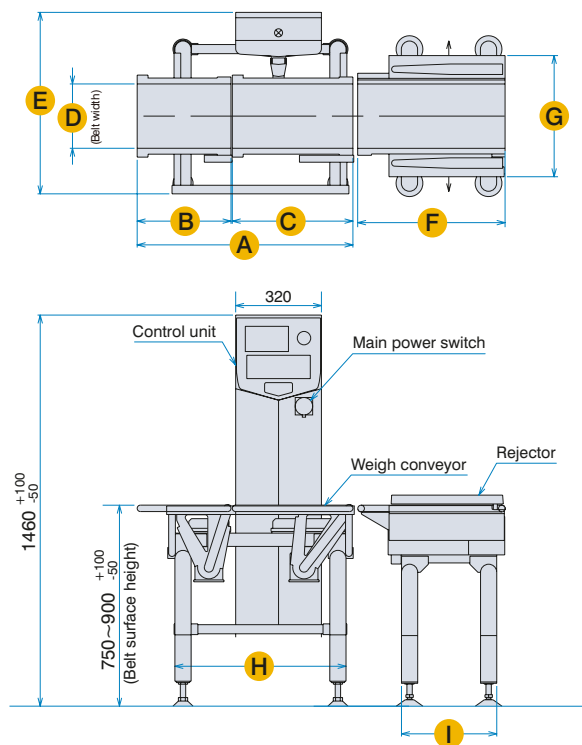

Model	A	B	C	D	E	F	G	H	I
DACS-G-F006-11/SS	605	450	150	100	670	450	375	540	355
DACS-G-F006-12/SS(CR)	605(600)	350(345)	250(245)	160	670	450(445)	375	540	355(405)
DACS-G-F006-13/SS(CR)	705(700)	350(345)	350(345)	160	670	450(445)	375	640	355(405)
DACS-G-F030-22/SS(CR)	605(600)	350(345)	250(245)	240	670	550(545)	455	540	355(475)
DACS-G-F030-23/SS(CR)	705(700)	350(345)	350(345)	240	670	550(545)	455	640	355(475)
DACS-G-F030-24/SS(CR)	805(800)	350(345)	450(445)	240	670	550(545)	455	640	355(475)
DACS-G-F030-33/SS(CR)	705(700)	350(345)	350(345)	320	800	750(745)	535	640	525(675)
DACS-G-F030-34/SS(CR)	905(900)	450(445)	450(445)	320	800	750(745)	535	840	525(675)
DACS-G-F030-35/SS(CR)	1005(1000)	450(445)	550(545)	320	800	750(745)	535	840	525(675)

*() are sizes of the CR waterproof model

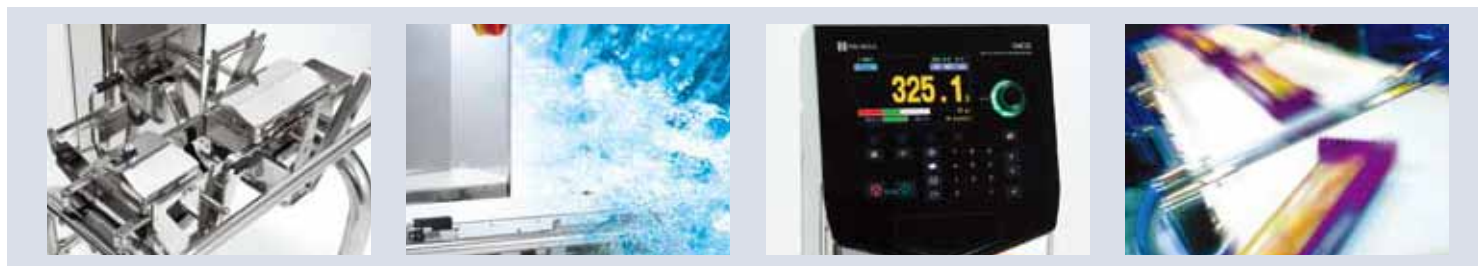

Ishida, the world leader in weighing technology, also manufactures a full line of multihead weighers, X-ray inspection systems, and packaging machines.



ISHIDA CO., LTD.

44 SANNO-CHO, SHOGOIN, SAKYO-KU
KYOTO, 606-8392 JAPAN
PHONE: 81-75-771-4141
FACSIMILE: 81-75-751-1634
URL: <http://www.ishida.com>

HEAT AND CONTROL

HEAT AND CONTROL, INC.

21121 CABOT BLVD.
HAYWARD, CA 94545-1132 USA
PHONE: 1(800)227-5980
1(510)259-0500
FACSIMILE: 1(510)259-0600
www.heatandcontrol.com
info@heatandcontrol.com

Specifications and design are subject to change without notice.